



S3M 型 · S5M 型 · S8M 型


产品特点: 只需紧固螺栓即可联结轴, 易于定位。

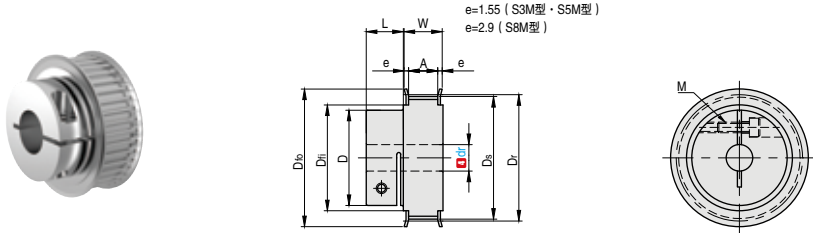


S3M型



S5M型



S8M型



▲内孔内有可能未进行表面处理, 齿槽尺寸会因齿数不同而略有差异

订购编号示例

1 代号 - 2 齿数 - 3 宽度代号 - 4 dr - 5 材料代码
SCPS3M - 30 - 10 - 8 - C

S3M 型

1 代号	2 齿数	主要尺寸									紧固螺栓			
		4 dr				Dr	Ds	D	Dfo	Dfi	L	M	紧固扭矩 (N·m)	
SCPS3M	24	4					22.92	22.16	13	26	18	9	2	0.4
	26	4					24.83	24.07	13	28	19			
	28	4					26.74	25.98	13	30	21			
	30	6 8					28.65	27.89	20	32	23			
	32	6 8					30.56	29.80	20	34	25	12.5	3	1.5
	36	6 8					34.38	33.62	26	38	29			
	40	8 10					38.20	37.44	26	42	33			
	44	8 10					42.02	41.25	31	46	36			
	48	8 10 11 12					45.84	45.07	33	49	40	14	4	3.5
	50	8 10 11 12 13 14					47.75	46.98	36	51	42			
60	8 10 11 12 13 14 15 16					57.30	56.53	41	61	52	15.5			

S5M 型

1 代号	2 齿数	主要尺寸									紧固螺栓		宽度规格有无					
		4 dr				Dr	Ds	D	Dfo	Dfi	L	M	紧固扭矩 (N·m)	10		15		
SCPS5M	24	8 10					38.20	37.24	26	42	30	12.5	3	1.5				
	25	8 10					39.79	38.83	26	43	32							
	26	8 10					41.38	40.42	31	45	33							
	28	8 10					44.56	43.60	31	48	36							
	30	10					47.75	46.79	31	51	39	14	4	3.5				
	32	10 11 12 13 14					50.93	49.97	36	55	42							
	34	10 11 12 13 14 15 16					54.11	53.15	41	58	46							
	36	10 11 12 13 14 15 16					57.30	56.34	41	61	49							
	40	10 11 12 13 14 15 16 17 18 19					63.66	62.70	46	67	55	15.5	5	6				
	44	12 13 14 15 16 17 18 19					70.03	69.07	46	74	62							
		20 21 22 23 24							55									
	48	12 13 14 15 16 17 18 19					76.39	75.43	46	80	68							
		20 21 22 23 24 25							55									
	50	12 13 14 15 16 17 18 19					79.58	78.62	46	83	71	16.5	6	12				
		20 21 22 23 24 25							55									
	60	12 13 14 15 16 17 18 19					95.49	94.53	46	99	87							
		20 21 22 23 24 25							55									

S8M 型

1 代号	2 齿数	主要尺寸									紧固螺栓							
		4 dr						Dr	Ds	D	Dfo	Dfi	L	M	紧固扭矩 (N·m)			
SCPS8M	20	12	13	14				50.93	49.56	36	62	40	14	4	3.5			
	22	12	13	14	15	16		56.02	54.65	41	64	45	16	5	6			
	24	12	13	14	15	16	17	18	19	61.12	59.74	46	70	50	16	5	6	
	25	12	13	14	15	16	17	18	19	63.66	62.29	46	72	52	16	5	6	
	28					15	16	17	18	19	71.30	69.93	46	80	59	16	5	6
							20	21	22	23						24	25	17
	30					15	16	17	18	19	76.39	75.02	46	85	64	16	5	6
								20	21	22						23	24	25
	32					18	19				81.49	80.12	46	90	69	16	5	6
								20	21	22						23	24	25
	34					18	19				86.58	85.21	46	95	74	16	5	6
								20	21	22						23	24	25
	36					18	19				91.67	90.30	46	100	79	16	5	6
								20	21	22						23	24	25

S3M 型

宽度代号	皮带宽度	主要尺寸	
		W	A
6	6	11	7
10	10	15	11

S3M 型

代号	齿数	dr	许用扭矩 (N·m)
SCPS3M	24 26 28	4	0.16
	30 32	6	0.95
		8	2.6
	36	6	0.95
		8	2.6
	40	8	2.6
		10	2.6
	44	8	2.6
		10	2.6
	48	8	2.6
		10	
		11	
		12	
	50	8	2.6
		10	
		11	
		12	
	60	13	7.6
		14	
		14	
		15	
		15	
		16	

S5M 型

宽度代号	皮带宽度	主要尺寸	
		W	A
10	10	16	11
15	15	22	17

S5M 型

代号	齿数	dr	许用扭矩 (N·m)
SCPS5M	24 25	8	2.6
	26 28	10	2.6
		8	2.6
	30	10	2.6
		10	2.6
	32	11	2.6
		12	2.6
		13	7.6
		14	7.6
	34 36	10	2.6
		11	
		12	
		13	
		14	
		15	
	40	16	7.6
		10	2.6
		11	
		12	
		13	
		14	
		15	
		16	
		17	
		18	
	44 48 50 60	19	7.6
		12	
		13	
		14	
		15	
		16	
		17	
		18	
		19	
		20	
		21	
		22	

S8M 型

宽度代号	皮带宽度	主要尺寸	
		W	A
15	15	22	17
25	25	33	28

S8M 型

代号	齿数	dr	许用扭矩 (N·m)
SCPS8M	20	12	2.6
	22	13	2.6
		14	7.6
		12	2.6
		13	2.6
	24 25	14	7.6
		15	7.6
		16	7.6
		17	7.6
		18	7.6
		19	7.6
	28 30	12	7.6
		13	
		14	
		15	
		16	
		17	
		18	
		19	
		20	
		21	
	32 34 36	22	7.6
		23	
		24	
		25	
		18	
		19	
		20	
		21	
		22	
		23	

代号	类型	材料代码	材质		表面处理	附件 (顶丝)
			带轮	挡片		
SCPS3M SCPS5M SCPS8M	开口型	A	铝合金	铝合金	本色阳极氧化处理	304
		C			黑色阳极氧化处理	

- ▲ 推荐轴公差 h7 (g6)
- ▲ 请将轴表面粗糙度加工到 3.2a 以下
- ▲ 法兰已铆接
- ▲ 附带内六角螺栓 (12.9 级, 黑色)